


### Product Image



### Product Dimensions

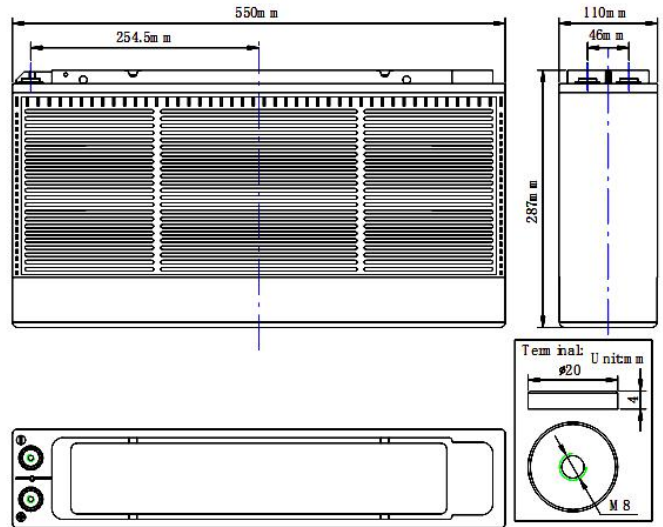

### Characteristics

Nominal Voltage		12V
Nominal Capacity (10 hour rate)		150Ah
Capacity 25°C (77°F)	20 hour rate (8A)	160Ah
	8 hour rate (18.4A)	147.4Ah
	5 hour rate (27.7A)	138.4Ah
	1 hour rate (111A)	111Ah
Internal Resistance	Full Charged Battery 25°C	≤2.5m Ω
Capacity affected by Temperature (10 hour )	40°C (104°F)	102%
	25°C (77°F)	100%
	0°C (32°F)	85%
	-15°C (5°F)	65%
Self-Discharge 25°C (77°F) Capacity	after 3 month storage	90%
	after 6 month storage	80%
	after 12 month storage	62%
Charge (Constant Voltage) 25°C (77°F)	Float	Initial Charging Current Less than 32A Voltage 13.6-13.8V
	Cycle	Initial Charging Current Less than 32A Voltage 14.4-14.9V

### Packaging

Battery Dimensions	Length	550mm
	Width	110mm
	Height	287mm
	Total Height	287mm
Box Dimensions	Length	565mm
	Width	125mm
	Height	347mm
Quantity Per Box		1 PC per box
Net weight Per Cell		44.5 kg ± 3%
Net weight Per Box		44.5kg
Gross Weight		45kg

#### Discharge Constant Current per Cell (Amperes at 77°F/25°C)







F.V/Time	10min	15min	30min	45min	1h	2h	3h	5h	8h	10h	20h
1.60V	259.8	215.0	143.4	116.5	89.6	62.4	44.9	28.5	19.2	15.6	8.32
1.65V	252.9	209.3	139.5	113.4	87.2	61.8	44.5	28.2	19.0	15.5	8.24
1.70V	245.9	203.5	135.7	110.2	84.8	61.2	44.1	28.0	18.8	15.3	8.16
1.75V	239.0	197.8	131.8	107.1	82.4	60.6	43.6	27.7	18.6	15.2	8.08
1.80V	232.0	192.0	128.0	104.0	80.0	60.0	43.2	27.4	18.4	15.0	8.00

#### Discharge Constant Power per Cell (Watts at 77°F 25°C)

F.V/Time	10min	15min	30min	45min	1h	2h	3h	5h	8h	10h	20h
1.60V	500.2	414.0	276.0	224.2	172.5	120.1	86.5	54.9	36.9	30.0	16.0
1.65V	486.8	402.9	268.6	218.2	167.9	119.0	85.7	54.4	36.5	29.7	15.9
1.70V	473.4	391.8	261.2	212.2	163.2	117.8	84.8	53.8	36.2	29.5	15.7
1.75V	460.0	380.7	253.8	206.2	158.6	116.7	84.0	53.3	35.8	29.2	15.6
1.80V	446.6	369.6	246.4	200.2	154.0	115.5	83.2	52.8	35.5	28.9	15.4

**Note** The above data are average values, and can be obtained within 3 charge/discharge cycles. These are not minimum values. Cell and battery designs/specifications are subject to modification without notice. Contact **US** for the latest information.

**Performance Characteristics**

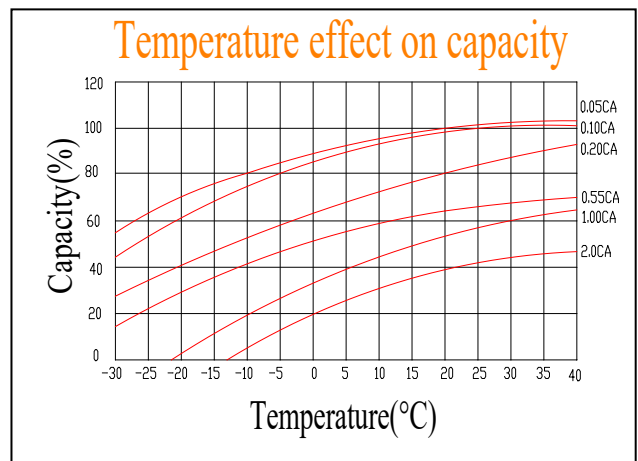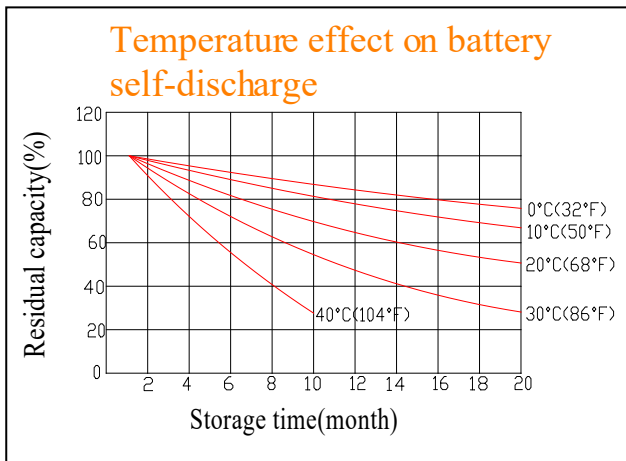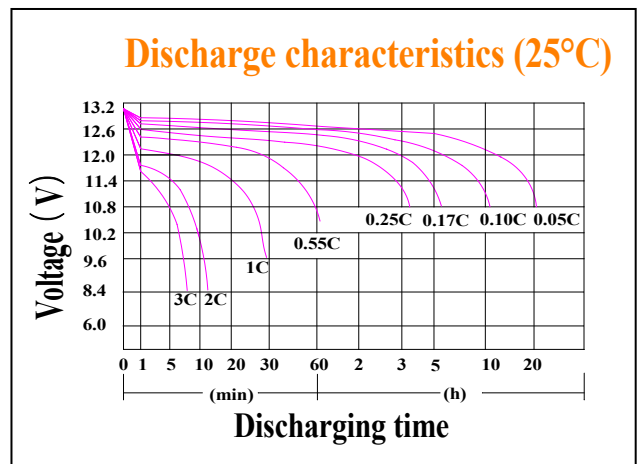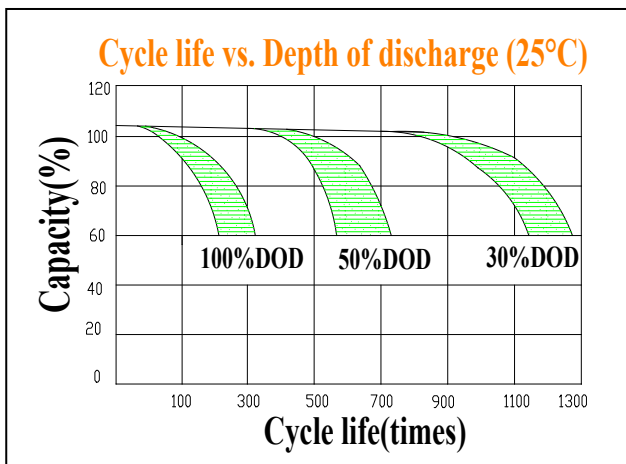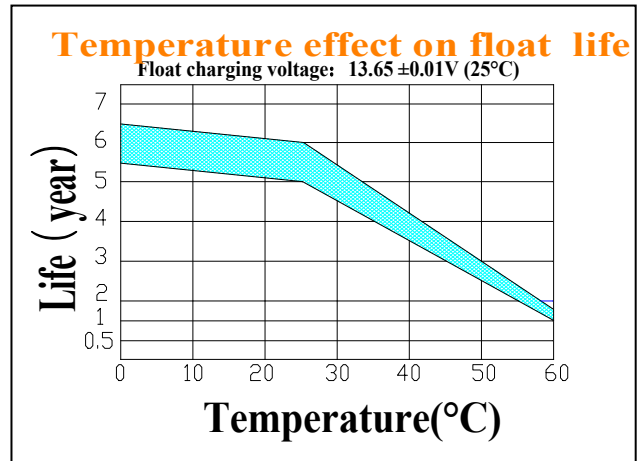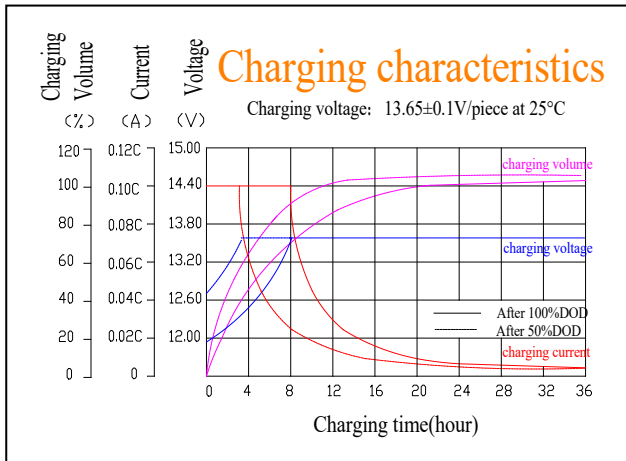

**Battery Construction**

<b>Component</b>	Positive plate	Negative plate	Container	Cover	Safety valve	Terminal	Separator	Electrolyte
<b>Raw material</b>	Lead dioxide	Lead	ABS	ABS	Si-Rubber	Copper	Fiberglass	Sulfuric acid